

SPEED QUEEN® MULTI-HOUSING LAUNDRY SOLUTIONS


Front Control Front Load Washer

Electronic

Built for Reliable Performance

Engineered and built like no other, the Speed Queen® front load washer is designed to be everything people thought a washer couldn't be, beginning with its revolutionary suspension and sensing technology. This groundbreaking innovation manages and redistributes out-of-balance loads to deliver uninterrupted cycles, virtually eliminate vibration and operate so quietly neighboring residents won't even know it's running. It also touts an incredible 440 G-Force extraction speed to maximize moisture removal, reduce dry times and minimize utility costs. And as if that's not game-changing enough, this smooth-running, laundry-optimizing machine delivers increased water efficiency for the ultimate user experience. It's everything you never knew it could be. Front load products have met every design standard to be 100% ADA compliant.

- Revolutionary balancing technology
- Industry leading 1200 RPM spin speed exerts 440 G-force extraction
- Extra-wide 15.5" door opening and 180° door swing
- Rugged suspension system
- Easy-to-read digital display
- Durable stainless steel tub
- Four-compartment soap dispenser

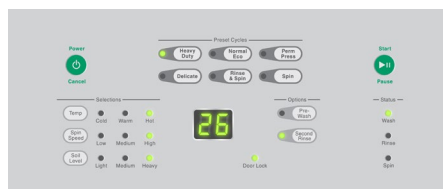

Electronic Control

Electronic control is designed for durability and easy operation with attractive selection buttons and cycle status indicator lights.



ENERGY STAR®
Certified Washer


Front Control Front Load Washer

Electronic

| Specifications | |
|--|--|
| Control Option | Electric |
| Color | White |
| Capacity - lb (kg) | 23 (10.5) |
| Cylinder Volume - cu. ft. (liters) | 3.42 (96.8) |
| Spin Speed G-Force (RPM) | 440 (1200) |
| Motor Size - HP (kw) | 0.9 (0.67) |
| Water Consumption Per Cycle - g (liter) | 13.68 (51.8) |
| IWF (WATER FACTOR) - gal/ft ³ (liters/liter/cycle) | 4.0 (0.53) |
| MEF ₁₂ (Modified Energy Factor) ft ³ /kWh/cycle (Liters/kWh/cycle) | 2.20 (62.3) |
| Available Water Temperatures | Hot, Warm, Cold |
| Available Cycles | Heavy Duty, Normal Eco, Perm Press, Delicate, Rinse & Spin, Spin |
| Electrical Requirements (v/Hz/Ph-Amp) | 220-240/50/1 |
| Water Pressure - p.s.i. (bar) | 20-120 (1.4/8.3) |
| Drain | Pump |
| Cylinder Finish | Stainless Steel |
| Net Weight - lb (kg) | 260 (118.3) |
| Shipping Weight - lb (kg) | 270 (122.5) |
| Shipping Dimensions Approx. - in (mm) | Width 34 (864) |
| | Depth 30 (762) |
| | Height 44.5 (1130) |
| Agency Approvals | cULus |

Models

LFNE5BSP303AW12

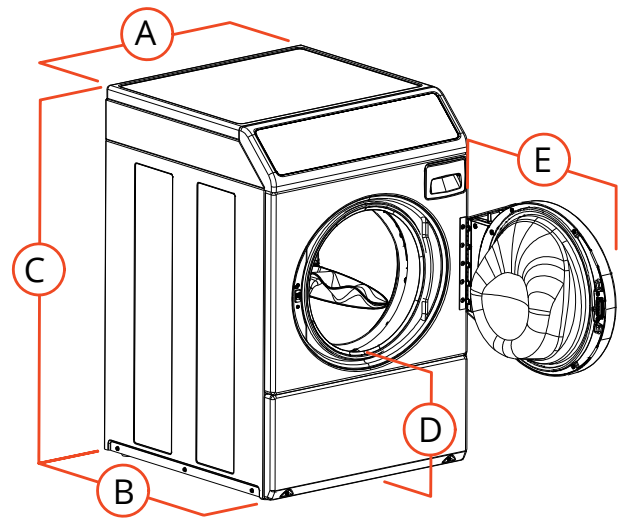

| | |
|-----------------------------------|--------------|
| A. Overall Width - in (mm) | 26.875 (683) |
| B. Overall Depth - in (mm) | 27.73 (704) |
| C. Overall Height - in (mm) | 40.42 (1027) |
| D. Floor To Door Opening -in (mm) | 14.6 (371)* |
| E. Door Swing - in (mm) | 24.06 (611) |

Supply inject kits available.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.